

SOLIDOR

CUSTOM MADE RUBBER PRODUCTS



**SOLIDOR Supports for terraces
they make the difference!**



Adjustable support for tiles with extension piece F35



Adjustable support for wooden terraces



Adjustable support for wooden terraces



Adjustable support for metal grates





PV3/5/CP60



PV11/15+CP60



PV5/9+CP60




PV15/19+CP60



PV9/13+CP60



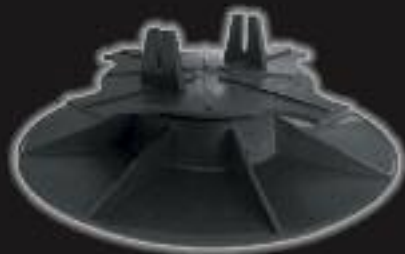

PV3/5/CP72



PV11/15+CP72



PV5/9+CP72



PV9/13+CP72



PV15/19+CP72





PV3/5/C3/4T



PV11/15+C3/4T



PV5/9+/C3/4T



PV15/19+C3/4T



PV9/13+C3/4T



C3/4T



CP60



CP72



C0





Extension piece F35



Fitting piece



Level regulator





SOLASTICK



S
O
L
A
S
T
I
C
K



AK 5/9 (for sides)



also available for heights 9/13, 11/15 and 15/19.



I-SO-PLOT (additional protection mat)



available for PV5/9, PV9/13, PV11/15 and PV15/19



RC10+CIP60



RC14+CIP60



RC19+CP60



RC24+CP60





RC10+CIP72



RC14+CIP72



RC19+CP72



RC24+CP72





RC10+CI3/4T

RC14+CI3/4T

RC19+C3/4T

RC24+C3/4T




**F
I
X
E
D

S
U
P
P
O
R
T
S**



CHARACTERISTICS:

- MATERIAL : POLYPROPYLENE COMPOUND
- TEMPERATURE RESISTANCE : -25/+80°C
- BLOCKING SYSTEM : ONCE SET TO THE DESIRED HEIGHT, THE FIXATION OF THE SUPPORT IS ENSURED BY THE MUTUAL BLOCKING OF THE PARTS
- STATIC PRESSURE : 1000 KG
- GROUND PLATE SURFACE : 300 CM²
- JOINT WIDTH BETWEEN TILES : 3 MM

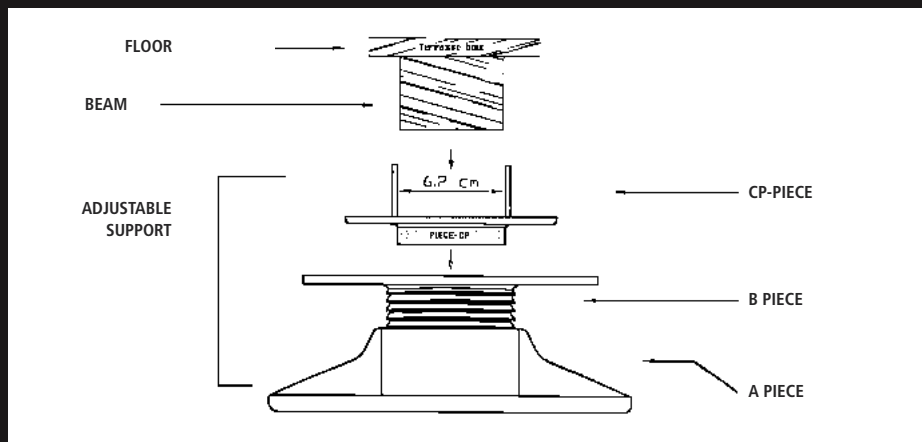


GOOD TO KNOW

- *distance* = in general, the distance between the supports is ± 40 to 50 cm
- *quantity* = in average 6 to 7 pieces per m²
- *height* = for a fine adjustment of the height, we use fitting pieces of 1,2,3,4 or 5 mm.



CHARACTERISTICS:

- MATERIAL : POLYPROPYLENE COMPOUND
- TEMPERATURE RESISTANCE : -25/+80°C
- BLOCKING SYSTEM : ONCE SET TO THE DESIRED HEIGHT,
THE FIXATION OF THE SUPPORT IS ENSURED BY
THE MUTUAL BLOCKING OF THE PARTS
- STATIC PRESSURE : 1000 KG
- GROUND PLATE SURFACE : 300 CM2
- JOINT WIDTH BETWEEN TILES : 3 MM

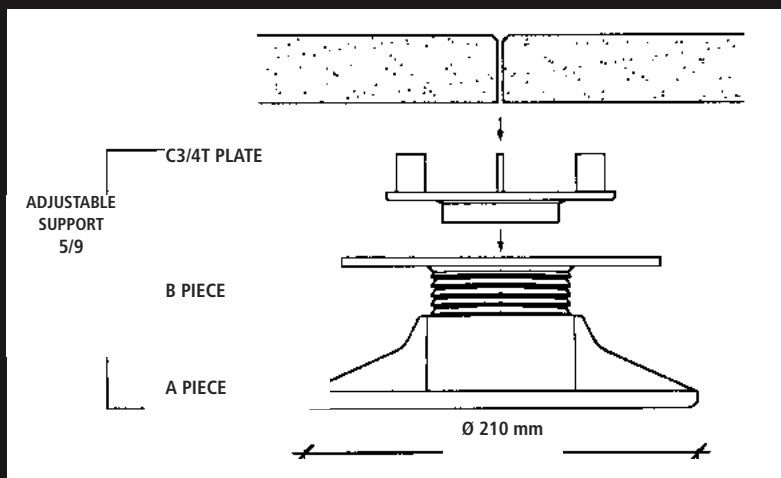

GOOD TO KNOW

- *upper plate* = C3/4T
 - *installation* = against the wall, the 2 upper tabs that are parallel to the wall must be pinched off so that the support can be put against the wall.
= in a corner, the 4 upper tabs must be pinched off.
 - *quantity* = to determine the quantity:
 - a) approximate calculation = number of tiles + 15 to 25%
 - b) precise calculation = multiply the number of tiles in the length + 1 by the number of tiles in the width + 1.
- Stability of tiles on the side: change eventually a row of tiles cut in half with a row of full tiles.





PV 11/15

PV 11/15

PV 11/15

/15

11/15



Adjustable support - Solidor
Standard serie

Solidor Rubber & Products

Lauwbergstraat 124b

B-8930 Lauwe

www.solidor.be

Tel. 32 (0)56 41 35 70 - Fax 32 (0)56 40 37 68